




UPSTATE DOOR

FINE DOOR SOLUTIONS... ONE SOURCE


Exterior Jamb Options

Scale: HALF


Single Rabbeted Jamb with Q-Lon
(Exterior Standard Inswing Option)

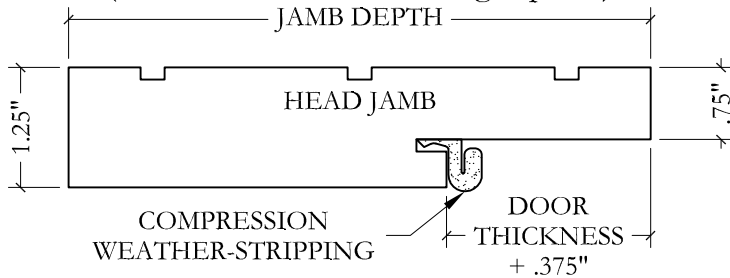

Single Rabbeted Duraframe Jamb
with Q-Lon

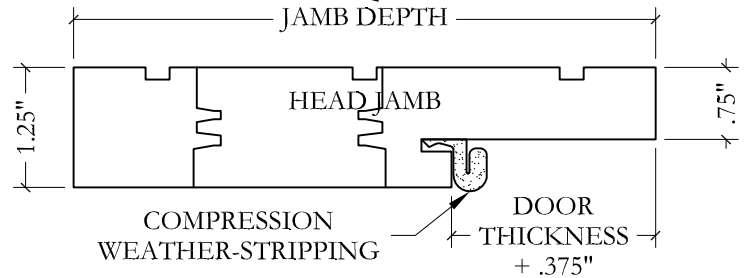


Double Rabbeted Jamb with Q-Lon
(Exterior Standard Inswing with Screen Option)

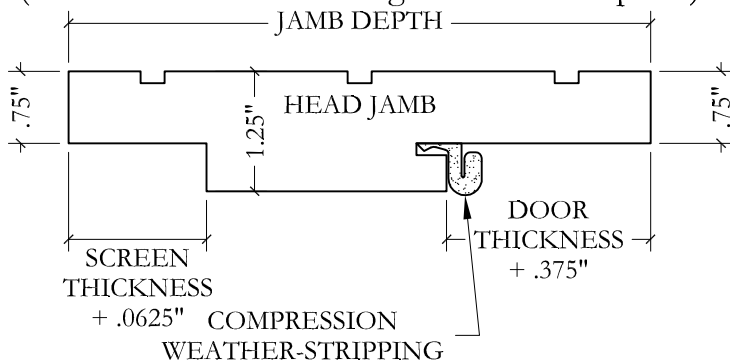


3" Spacing Between Face of Door and Face of Screen/Storm Door is Recommended For Hardware Clearance.

Double Rabbeted Jamb with Q-Lon and
Screen/Storm Weatherstripping
(Impact/Coastal Standard Inswing with Screen
Option)

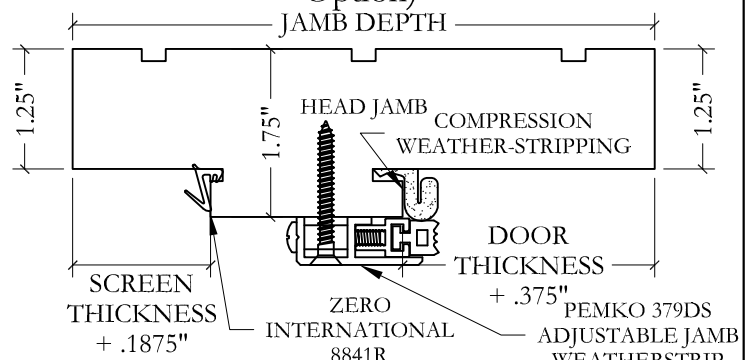


3" Spacing Between Face of Door and Face of Screen/Storm Door is Recommended For Hardware Clearance.

Single Rabbeted Jamb with Q-Lon
and Secondary Weatherstripping
(Exterior Standard Outswing Option)

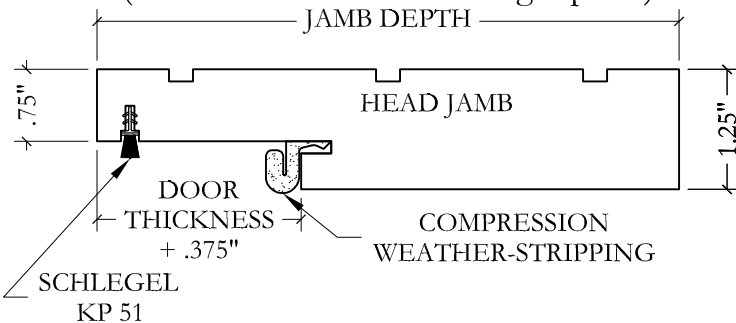

Double Rabbeted Jamb with Q-Lon
and Secondary Weatherstripping
(Outswing Door With Screen/Storm Option)

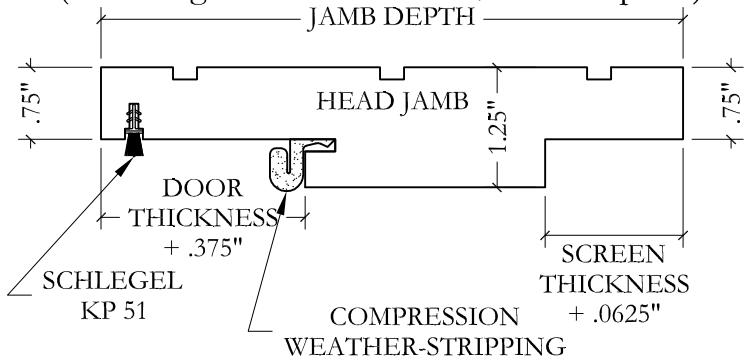

3" Spacing Between Face of Door and Face of Screen/Storm Door is Recommended For Hardware Clearance.




UPSTATE DOOR

FINE DOOR SOLUTIONS... ONE SOURCE


Interior/Fire Rated Jamb Options

Scale: HALF


Flat Jamb with Applied Stop (Interior Standard Option)

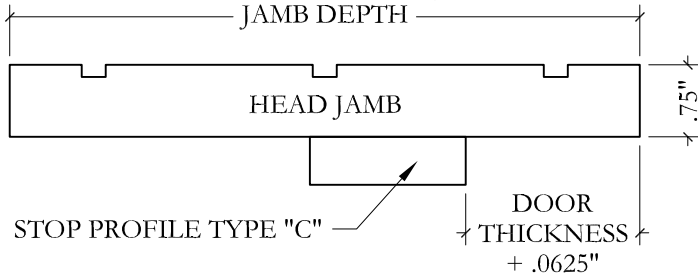


Flat Finger Jointer Jamb with Applied Stop

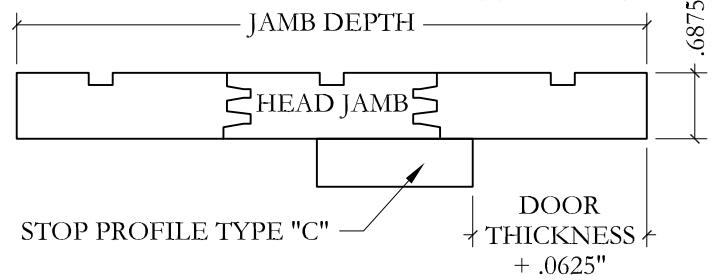


Single Rabbeted Jamb

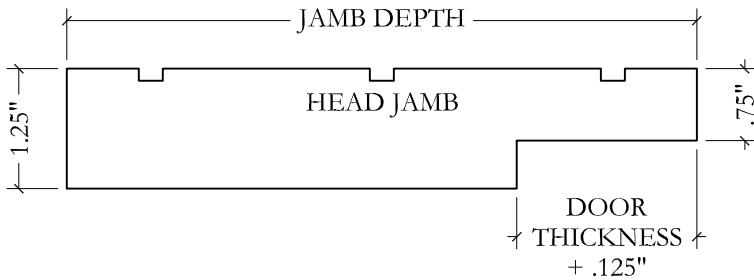


Single Rabbeted Finger Jointed Jamb

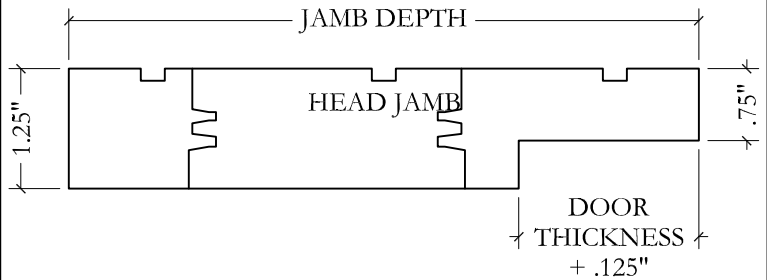


Double Rabbeted Jamb

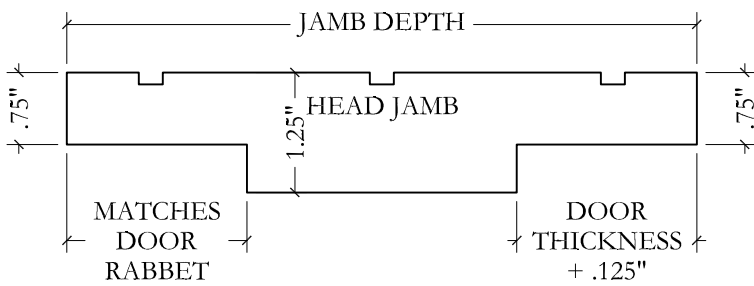


Double Rabbeted Finger Jointed Jamb Jambs Come with Specific Rabbet Depths This Restricts Jamb Depths Available.

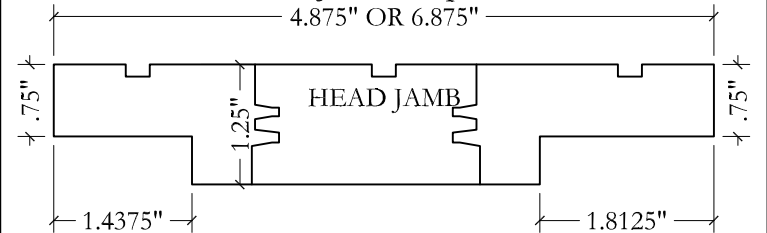


20 Minute Fire Rated Flat Jamb with Applied Stop

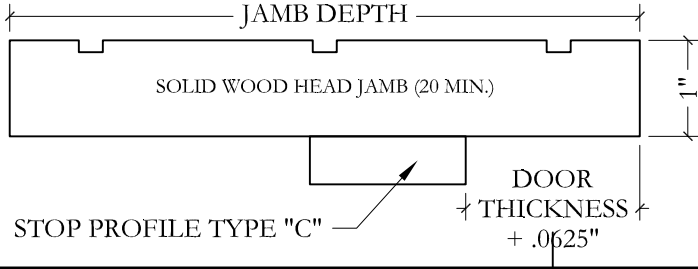

20 Minute Fire Rated Single Rabbeted Jamb (Double Rabbeted is Also Available)

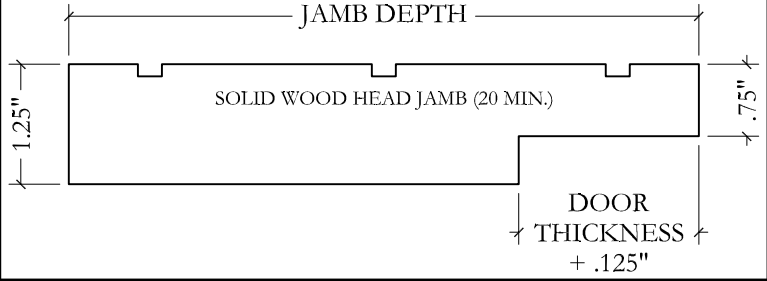

45 or 60 Minute Fire Rated Flat Jamb with Applied Stop

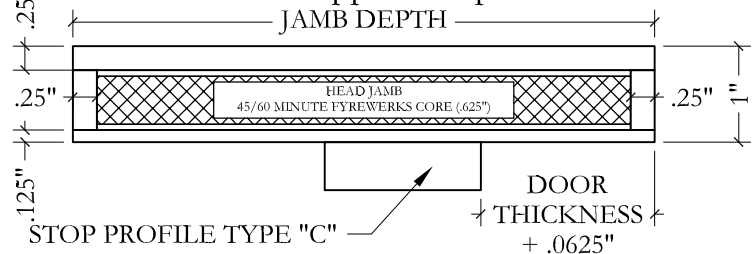

90 Minute Fire Rated Flat Jamb with Applied Stop

